




# StoryWalk® Solutions

FRAME with MOUNT FOR YOUR WOOD POST - FLUSH

- Designed for an 18”H x 24”W page, with a viewable area of 17”H x 23”W
- Flush mounted to the post
- Aluminum frame attaches directly to wood or recycled plastic post. (60” post not included)
  - Optional post protector is available to inhibit weathering of the post top
- Removable bottom rail for easy page insertion
- Two sheets of acrylic protect the laminated page
- 3 Year Warranty on the powder-coated aluminum frame.
- Made in the USA

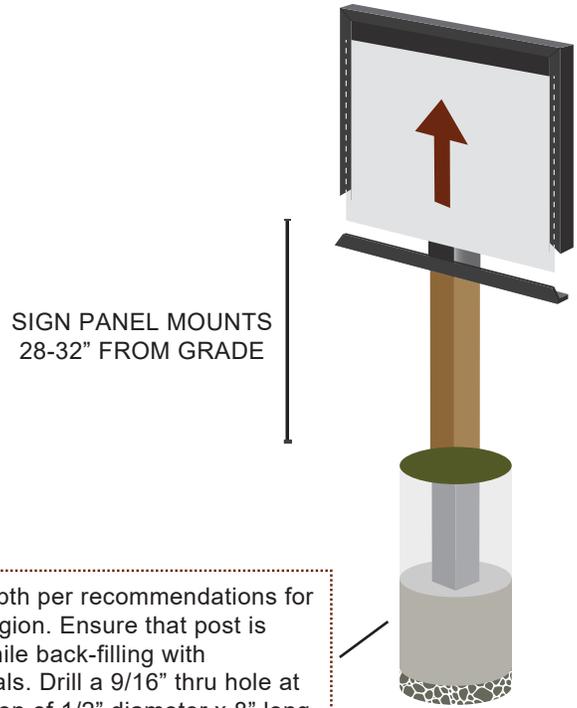

Prepare footing depth per recommendations for your geographic region. Ensure that post is plumb and level while back-filling with appropriate materials. Drill a 9/16” thru hole at post-end for insertion of 1/2” diameter x 8” long piece of rebar for added security.


\*\*\*\*\*

### Assembly Instructions:

1. Install the mount assembly to the post using the (2) SPAX screws and the provided SPAX driver.
2. Attach the frame to the mount assembly with the (4) allen head screws, washers and nylock nuts. You will need a 7/16” socket wrench and the provided allen driver to install the hardware. DO NOT use power tools as the stainless hardware may gall and seize.
3. Remove the 2 screws from the bottom frame rail with the provided allen driver.
4. Insert the acrylic sheets and replace the bottom rail.

### Page Installation Instructions - First time

1. Remove the bottom frame rail using the provided allen driver
2. Remove the blue masking from both sides of the acrylic sheets.
3. Place your page and optional colored backer between the sheets of acrylic.
4. Slide the sheets into the frame bottom.
5. Replace the bottom rail.

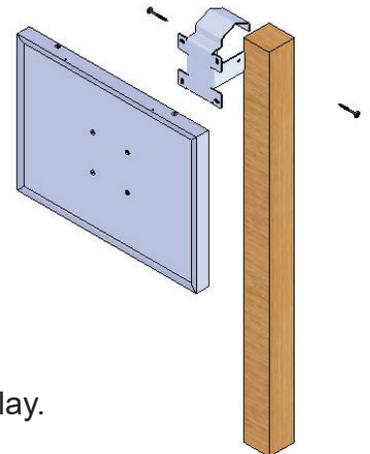

### Cleaning Instructions:

- Use a soft cloth and a diluted soap & water solution to wash the display.
- Dry the display with a soft cloth.
- DO NOT USE ammonia cleaners (Windex) or paper towels as they may damaged the display.